

## LED Prodisc III

STR. 1/2


LED Prodisc III bílé

# 40009370

EAN: 8720604743760

### STYLOVÉ, MULTIFUNKNÍ EŠENÍ OSVTLENÍ S BEZKONKURENNÍM POMREM CENA/KVALITA

Svítidla Prodisc znaky Prolumia si již vybudovala na trhu pevnou pozici. Prolumia s potěšením oznamuje příchod nové generace těchto svítidel. Série Prodisc III má moderní design a vyšší účinnost. Extrémně pevný kryt a difuzor se skládají z nárazuvzdorného a neholavého polykarbonátu. Svítidla jsou navíc vybavena novou svítelnou technologií a napájením bez blikání, volitelně s integrovaným idlem pohybu. K dispozici také funkce nouzového osvětlení. Díky tomu je tato velmi univerzální sada svítidel Prodisc III za konkurenceschopnou cenu.

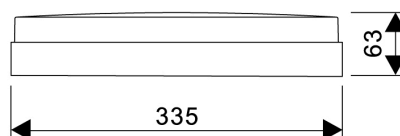

## VLASTNOSTI PRODUKTU

Suitable for wall mounting	✓	Nominal voltage	220 240 Volt
Suitable for wall mounting	✓	Rated lifetime L70/B50 at 25 °C	175000 Hour
Suitable for suspended mounting	✗	Rated lifetime L80/B50 at 25 °C	110000 Hour
Suitable for ceiling mounting	✓	Lumen maintenance at median useful life of 35,000 h at 25 °C ambient (tq)	95 Percentage
Suitable for built-in mounting	✗	Rated life time L70/B10 at 25 °C	120000 Hour
Suitable for surface mounting	✓	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq)	93 Percentage
Suitable for light line configuration	✗	Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq)	89 Percentage
Suitable for workplace according to EN 12464-1	✗	Rated life time L80/B10 at 25 °C	75000 Hour
Lamp type	LED not exchangeable	Rated life time L90/B10 at 25 °C	38000 Hour
With light source	✓	Rated life time L90/B50 at 25 °C	50000 Hour
Lamp holder	Other	Max. number of luminaires per miniature circuit breaker B16 (MCB)	64
Housing material	Plastic	Max. number of luminaires per miniature circuit breaker C16 (MCB)	128
Surface protection housing	Other	Rated ambient temperature according to IEC 62722-2-1	-25 50 Degrees celsius
Housing colour	White	Luminaire efficacy	110 Lumen/Watt
Material cover	Plastic, opal	Rated luminous flux according to IEC 62722-2-1	1700 Lumen
Type of grid	None	Max. system power	15 Watt
Voltage type	AC/DC	Colour temperature	3000 4000 Kelvin
Type of control gear	LED operating device current-controlled	Power factor	0,9
With control gear	✓	Height/depth	63 Millimetre
Exchangeable control gear	✗	Outer diameter	335 Millimetre
Dimming 0-10 V	✗	Built-in diameter	300 Millimetre
Dimming 1-10 V	✗	Number of poles	2
Dimming DALI	✗		
Dimming DALI-2	✗		
Dimming DMX	✗		

## LED Prodisc III

PAGINA 2/2

LED Prodisc III bílé

# 40009370

EAN: 8720604743760

### VLASTNOSTI PRODUKTU

(Pokraování)

Dimming DSI	×
Dimming GPRS	×
Dimming LineSwitch	×
Dimming manufacturer's proprietary system	×
Dimming mains voltage modulation	×
Dimming phase cut-off (trailing edge)	×
Dimming phase cut-on (leading edge)	×
Dimming programmable	×
Dimming potentiometer (integrated)	×
Dimming RF	×
Dimming Touch and Dim	×
Dimming Sine Wave Reduction	×
Dimming Zigbee	×
Dimming with push-button	×
Light distributor	Diffuser lens/optic/panel
No dim function	✓
Light distribution	Symmetric
Dimming depending on control gear	×
Beam angle	>80° - Extreme wide beam
Colour consistency (McAdam ellipse)	SDCM3
Light outlet	Direct
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Degree of protection (IP)	IP44
Impact strength	IK10
Protection class according to IEC 61140	II
Emergency power supply integrated	×
Suitable for emergency lighting	×
With movement sensor	×
With light sensor	×
Covering of the luminaire with thermally insulating material possible	×
With air slots	×
Filament test according to IEC 60695-2-11	650 °C - 30 s
Colour of light according to EN 12464-1	Neutral white 3300-5300 K
Colour of light	White
Colour rendering index CRI	80-89
Type of wiring	Ending
Connection type	Push-in clamp
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Beam angle adjustable	No
Operation by Bluetooth	×
Compatible with Casambi	×
Compatible with Apple HomeKit	×
Compatible with Google Assistant	×
Compatible with Amazon Alexa	×
IFTTT support available	×
Meets min. EIA service life criterion L90 (at 50,000 hours at tq = 25 °C)	×